



Standard Features



70100 Shown

QUICK BELT CHANGE

The rear wheel quick change assembly makes belt changing a quick and simple operation. Lift handle and depress the button located in the center of the quick change knob, pull the handle forward to release tension, remove and replace the abrasive belt. The ratchet design of the quick change provides a positive and variable belt tension for loose belt and contour work.

BELT TRACKING ADJUSTMENT



70100 shown

SAFETY GUARDING


Burr King industrial grinders/buffers are fully guarded to protect pinch-points and unused portions of belt track areas. Guards permit easy access for rapid change of belts/discs and buffing wheels.

Models 760 and 960 are shown



Model 760 (70100) shown with optional DS7 dust scoop

Model 960-400 (95103) shown with optional DS94-2 dust scoop

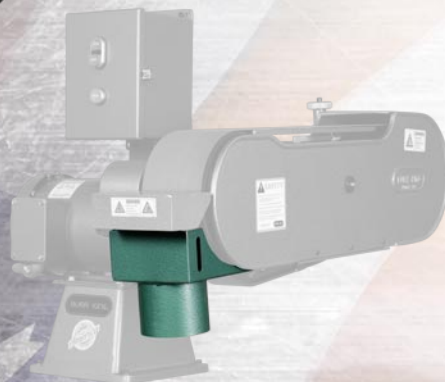

Positive tracking of the belt on the contact wheel is achieved by rotating the tracking knob to track belt left or right on the contact wheel while the machine is running. This patented device is easily accessible to the operator.